


Basic, Excellent, Premium Systems

# Ceiling Tiles



**Perfect for Ceilings**  
*with Lots Behind them*


Aesthetics and accessibility in perfect harmony



Vogl Ceiling Tiles are accessible, perforated ceiling panels with high acoustic performance for installation into T-profile systems.

The black acoustic fleece lining on the back (other colours on request) satisfies the highest demands on sound absorption.

Vogl Ceiling Tiles come with a pure white finishing coat (similar to RAL 9010).




**Installation system:** Basic (T15/T24) visible installation  
**Standards:** EN 14190 "Gypsum plasterboard products from reprocessing"  
**Material class:** A2-s1, d0 (non-combustible) according to EN 13501  
**Long edge:** SK (sharp-edged)  
**Short edge:** SK (sharp-edged)



Illustration	Item number	Description	Details	Piece/PU PU/pallet
	7301100000	GP-K Basic 600 T15/T24 smooth	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7301200000	GP-K Basic 625 T15/T24 smooth	625 x 625 x 12.5 mm	
	7301101110	GP-K Basic 600 T15/T24 6/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7301201110	GP-K Basic 625 T15/T24 6/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	
	7301102110	GP-K Basic 600 T15/T24 8/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7301202110	GP-K Basic 625 T15/T24 8/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	
	7301107110	GP-K Basic 600 T15/T24 12/20/66R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7301207110	GP-K Basic 625 T15/T24 12/20/66R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	
	7301108110	GP-K Basic 600 T15/T24 8/18Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7301208110	GP-K Basic 625 T15/T24 8/18Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	
	7301109110	GP-K Basic 600 T15/T24 12/25Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7301209110	GP-K Basic 625 T15/T24 12/25Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	
	7301112110	GP-K Basic 600 T15/T24 5/82/15.4SL AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7301212110	GP-K Basic 625 T15/T24 5/82/15.4SL AVS Acoustic fleece, black	625 x 625 x 12.5 mm	
	7301114110	GP-K Basic 600 T15/T24 3.5/9Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7301214110	GP-K Basic 625 T15/T24 3.5/9Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	

Further perforation patterns/dimensions available on request

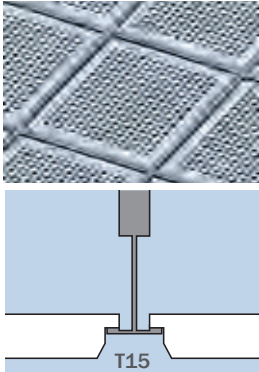

Vogl Ceiling Tiles are accessible, perforated ceiling panels with high acoustic performance for installation into T-profile systems.

The black acoustic fleece lining on the back (other colours on request) satisfies the highest demands on sound absorption.


Vogl Ceiling Tiles come with a pure white finishing coat (similar to RAL 9010).

**Installation system:** Excellent (T15) partially concealed installation  
**Standards:** EN 14190 "Gypsum plasterboard products from reprocessing"  
**Material class:** A2-s1, d0 (non-combustible) according to EN 13501  
**Long edge:** FK T15 (chamfered), type Excellent  
**Short edge:** FK T15 (chamfered), type Excellent



Illustration	Item number	Description	Details	Piece/PU PU/pallet
	7311300000	GP-K Excellent 600 T15 smooth	600 x 600 x 12.5 mm	6 pcs.
	7311500000	GP-K Excellent 625 T15 smooth	625 x 625 x 12.5 mm	28 PU
	7311301110	GP-K Excellent 600 T15 6/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311501110	GP-K Excellent 625 T15 6/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	7311302110	GP-K Excellent 600 T15 8/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311502110	GP-K Excellent 625 T15 8/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	7311307110	GP-K Excellent 600 T15 12/20/66R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311507110	GP-K Excellent 625 T15 12/20/66R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	7311308110	GP-K Excellent 600 T15 8/18Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311508110	GP-K Excellent 625 T15 8/18Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	7311309110	GP-K Excellent 600 T15 12/25Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311509110	GP-K Excellent 625 T15 12/25Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	7311312110	GP-K Excellent 600 T15 5/82/15.4SL AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311512110	GP-K Excellent 625 T15 5/82/15.4SL AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	7311314110	GP-K Excellent 600 T15 3.5/9Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311514110	GP-K Excellent 625 T15 3.5/9Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU

Further perforation patterns/dimensions available on request

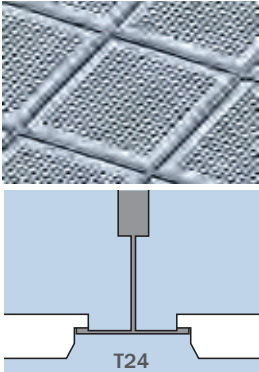

Vogl Ceiling Tiles are accessible, perforated ceiling panels with high acoustic performance for installation into T-profile systems.

The black acoustic fleece lining on the back (other colours on request) satisfies the highest demands on sound absorption.

Vogl Ceiling Tiles come with a pure white finishing coat (similar to RAL 9010).


**Installation system:** Excellent (T24) partially concealed installation  
**Standards:** EN 14190 "Gypsum plasterboard products from reprocessing"  
**Material class:** A2-s1, d0 (non-combustible) according to EN 13501  
**Long edge:** FK T24 (chamfered), type Excellent  
**Short edge:** FK T24 (chamfered), type Excellent



Illustration	Item number	Description	Details	Piece/PU PU/pallet
	7311400000	GP-K Excellent 600 T24 smooth	600 x 600 x 12.5 mm	6 pcs.
	7311600000	GP-K Excellent 600 T24 smooth	625 x 625 x 12.5 mm	28 PU
	7311401110	GP-K Excellent 600 T24 6/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311601110	GP-K Excellent 625 T24 6/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	7311402110	GP-K Excellent 600 T24 8/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311602110	GP-K Excellent 625 T24 8/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	7311407110	GP-K Excellent 600 T24 12/20/66R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311607110	GP-K Excellent 625 T24 12/20/66R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	7311408110	GP-K Excellent 600 T24 8/18Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311608110	GP-K Excellent 625 T24 8/18Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	7311409110	GP-K Excellent 600 T24 12/25Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311609110	GP-K Excellent 625 T24 12/25Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	7311412110	GP-K Excellent 600 T24 5/82/15.4SL AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311612110	GP-K Excellent 625 T24 5/82/15.4SL AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU
	7311414110	GP-K Excellent 600 T24 3.5/9Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs.
	7311614110	GP-K Excellent 625 T24 3.5/9Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	28 PU

Further perforation patterns/dimensions available on request



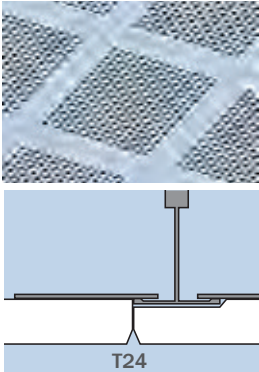

Vogl Ceiling Tiles are accessible, perforated ceiling panels with high acoustic performance for installation into T-profile systems.

The black acoustic fleece lining on the back (other colours on request) satisfies the highest demands on sound absorption.

Vogl Ceiling Tiles come with a pure white finishing coat (similar to RAL 9010).


**Installation system:** Premium (T24) concealed installation  
**Standards:** EN 14190 "Gypsum plasterboard products from reprocessing" "  
**Material class:** A2-s1, d0 (non-combustible) according to EN 13501  
**Long edge:** FK T24 (chamfered), type Premium  
**Short edge:** FK T24 (chamfered), type Premium




Illustration	Item number	Description	Details	Piece/PU PU/pallet
	7331400000	GP-K Premium 600 T24 smooth	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7331600000	GP-K Premium 625 T24 smooth	625 x 625 x 12.5 mm	
	7331401110	GP-K Premium 600 T24 6/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7331601110	GP-K Premium 625 T24 6/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	
	7331402110	GP-K Premium 600 T24 8/18R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7331602110	GP-K Premium 625 T24 8/18R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	
	7331407110	GP-K Premium 600 T24 12/20/66R AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7331607110	GP-K Premium 625 T24 12/20/66R AVS Acoustic fleece, black	625 x 625 x 12.5 mm	
	7331408110	GP-K Premium 600 T24 8/18Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7331608110	GP-K Premium 625 T24 8/18Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	
	7331409110	GP-K Premium 600 T24 12/25Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7331609110	GP-K Premium 625 T24 12/25Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	
	7331412110	GP-K Premium 600 T24 5/82/15.4SL AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7331612110	GP-K Premium 625 T24 5/82/15.4SL AVS Acoustic fleece, black	625 x 625 x 12.5 mm	
	7331414110	GP-K Premium 600 T24 3.5/9Q AVS Acoustic fleece, black	600 x 600 x 12.5 mm	6 pcs. 28 PU
	7331614110	GP-K Premium 625 T24 3.5/9Q AVS Acoustic fleece, black	625 x 625 x 12.5 mm	

Further perforation patterns/dimensions available on request

Basic T15/T24 ("exposed" grid):

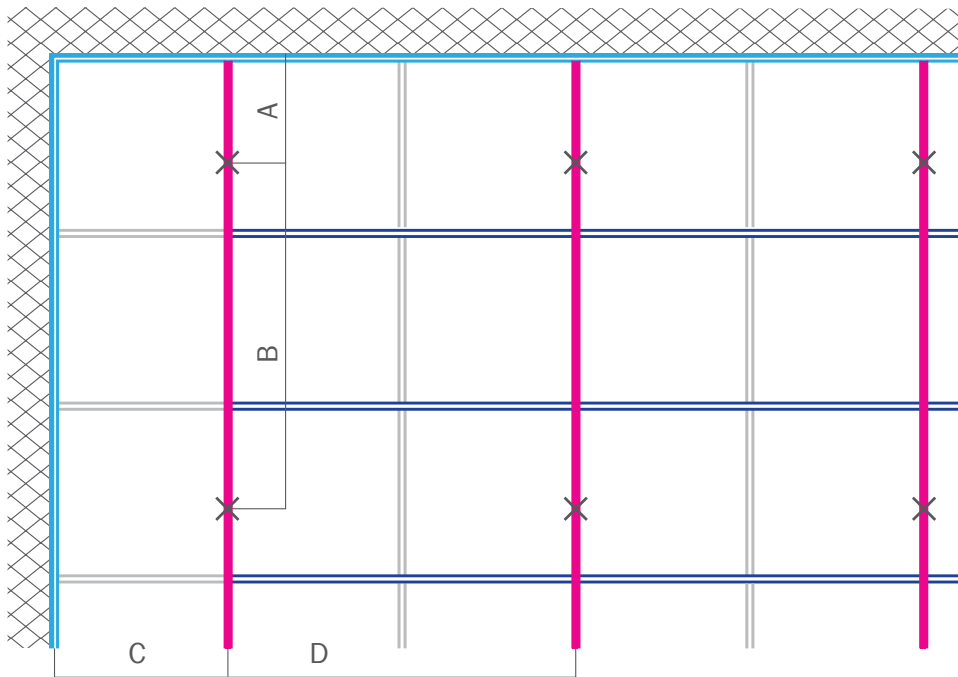


A = max. 400 mm    B = max. 1200/1250 mm    C = max. 600/625 mm    D = 600/1200 mm or 625/1250 mm

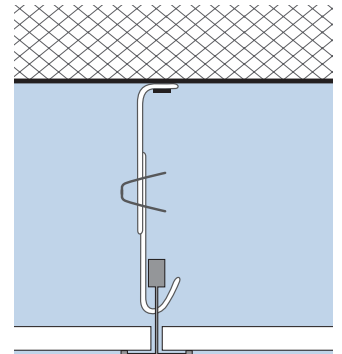


- Wall angle or stepped wall angle
- Secondary profile
- Cross profile "long"
- Cross profile "short"
- Quick hanger (type dependent on suspension height)

Basic T15/T24 ("rebated" grid):


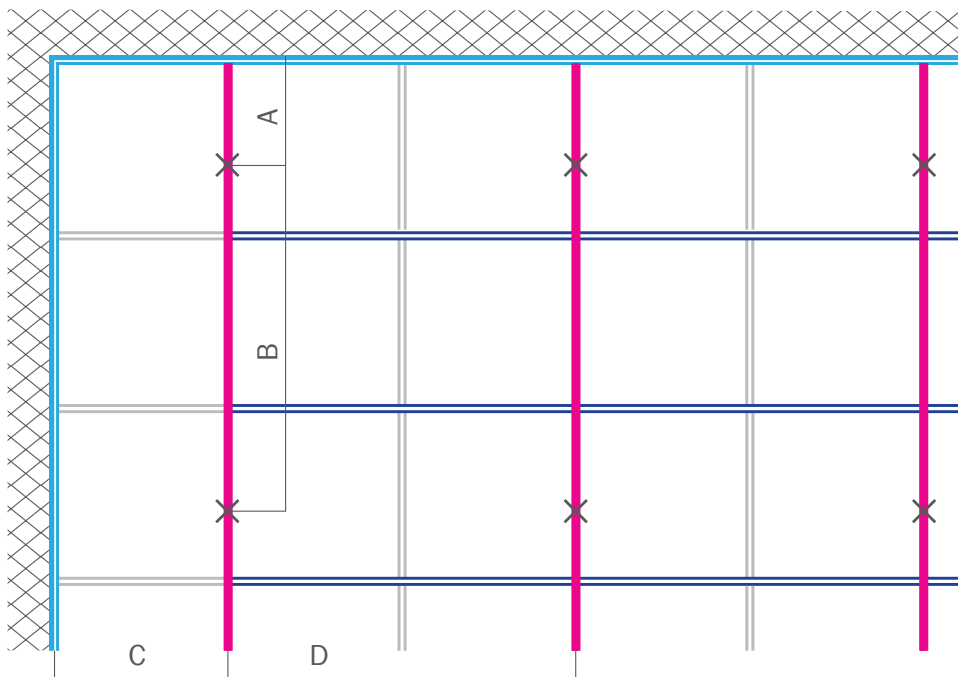


A = max. 400 mm    B = max. 1200/1250 mm    C = max. 600/625 mm    D = 600/1200 mm or 625/1250 mm

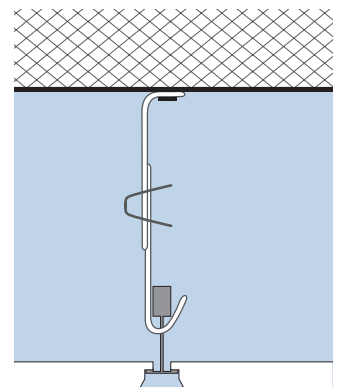

- Wall angle or stepped wall angle
- Secondary profile
- Cross profile "long"
- Cross profile "short"
- Quick hanger (type dependent on suspension height)

Premium T24 ("concealed" grid):

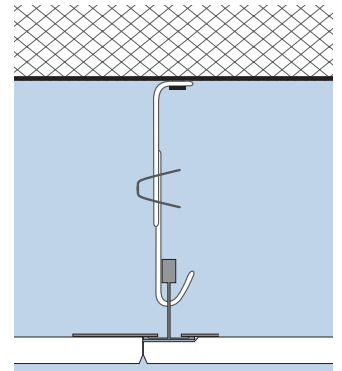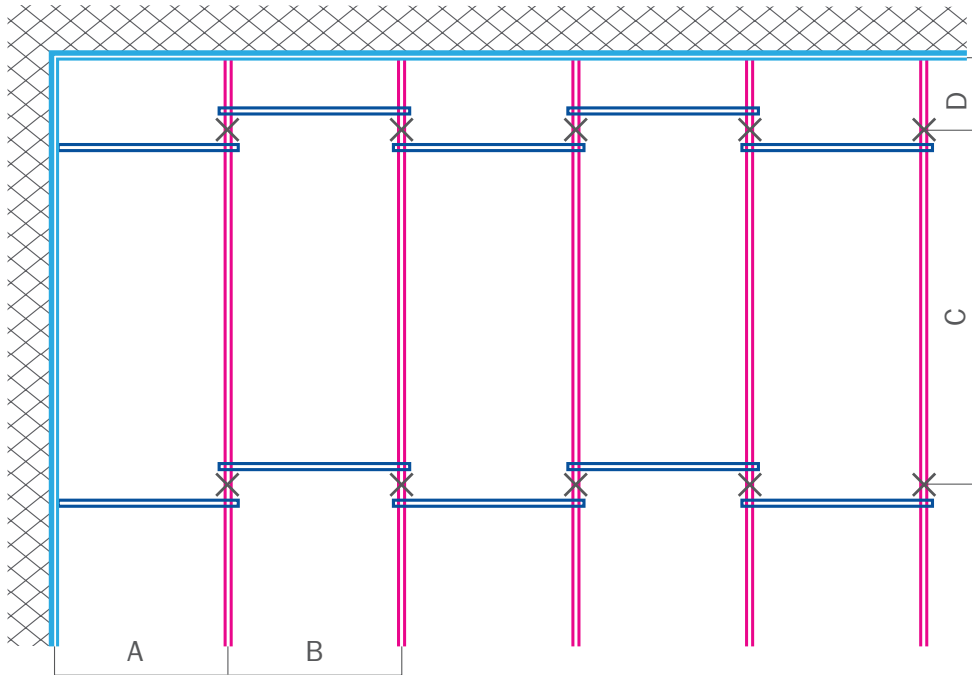


A = max. 600/625 mm    B = max. 600/625 mm    C = max. 1500 mm    D = max. 100 mm

- Wall angle or stepped wall angle
- Secondary profile
- Spacer
- Quick hanger (type dependent on suspension height)

Possible suspended brackets:

Standard suspension:	Item numbers		Item numbers	
	23110100 23110200 23110300 23110400	Easy-span hanger hooked wire/hooked wire		20311000 Quick hanger T-profile
	23120100 23120200 23120300 23120400	Easy-span hanger hooked wire/eyelet wire		20312000 Quick hanger T-profile Klick Fix II
Rigid suspension:	Item numbers		Item numbers	
	25003000	Vernier suspended bracket, bottom part for T-profile		25001000 25001300 25001500 Vernier short hanger set, for T-profile


The alignment of the ceiling framework must always be started in the room centre. Observe the framework manufacturer's installation instructions.



**General site conditions:**

- The site temperature should not fall below +5°C
- Avoid major fluctuations in temperature and humidity
- Always store the tiles in a dry place, protected against moisture
- Observe the maximum stacking height during shipping and storage
- Avoid damage to the surface finish by all means

After completion of the framework installation, check the entire ceiling surface to make sure that the secondary profiles are perfectly aligned. Adjust the easy-span hangers to make sure they fit tightly and the structure is level.

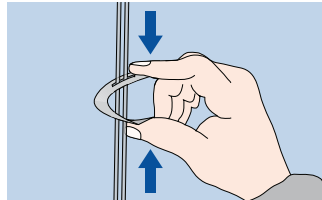



**IMPORTANT!**

Wear clean fabric gloves when handling the tiles.


**TIP:**

Make sure perimeter tiles are always bigger than half a tile! (Align the structure accordingly)

All ceiling tiles have a marking on the back. The marking indicates the direction of installation (it must always point in one direction). Failure to observe the direction of installation results in a "shadow effect".

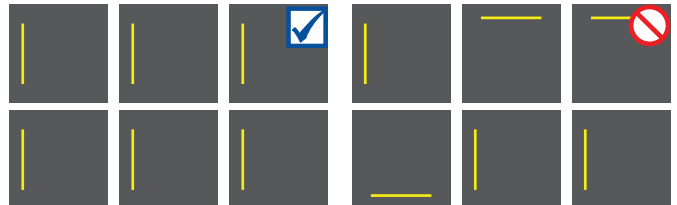

Now insert the tiles in the T-profiles observing the special features of the respective edge type. Always wear clean gloves throughout the installation work.



**Repair & upgrade:**

The special factory-applied surface texture of the tiles allows later repairs only on a minor scale. Should re-coating of the ceiling tiles become necessary, the paint must by all means be applied with a roller (see "Painting Instructions"). For this purpose, the individual tiles must be removed from the grid.

