

## StoColor Rapid family

### Quick-action paints with first-class hiding power

It is with good reason that the one-coat paints of the StoColor Rapid family are amongst the best-selling professional interior paints. They offer a high application speed, and even in case of dark substrates usually one coat is sufficient to achieve an optimal result. This saves time and money. The three variations of the Rapid family - StoColor Rapid, StoColor Rapid Ultramatt and StoColor Rapid Satin - adapt optimally to widely differing substrates and provide the right solution for every situation.




# StoColor Rapid family

## A strong trio for every substrate



One coat generally suffices

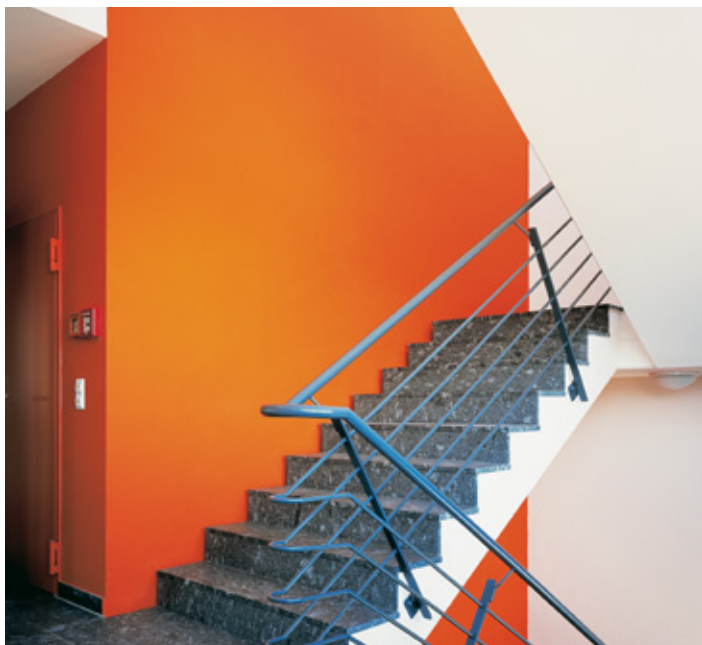

Complete colour choice and durable surfaces with StoColor Rapid

### StoColor Rapid – for rough substrates

The classic amongst the quick-action interior paints is perfectly suited for rough substrates such as wood-chip and plaster. On the market for 20 years, StoColor Rapid has been consistently optimised and is a synonym for both high-quality and economical interior paints. The paint has hiding power class 1 and is graded in wet scrub resistance class 3.

### StoColor Rapid Ultramatt – for smooth substrates

The dead-matt finish with excellent flow properties is ideal for extra-smooth and plastered substrates in glancing light. Thanks to its filling properties and with the corresponding substrate preparation, StoColor Rapid Ultramatt ensures that texture variations are barely discernable even under glancing light. The paint has hiding power class 1 and is graded in wet scrub resistance class 3.

### StoColor Rapid Satin

A silk-matt finish with optimum cleaning properties is the first choice, particularly as a coating in heavily frequented rooms. In areas subject to high mechanical stress where matt paints generally become glossy and "shiny", StoColor Rapid Satin consistently retains its silk-matt finish. The paint has hiding power class 1 and is graded in wet scrub resistance class 2.

## All benefits at a glance

- Hiding power class 1
- Wet scrub resistance class 2 or 3
- Not affected by glancing light
- Very good for touching up
- Limited tintability in accordance with the StoColor System (pastel range)
- Saves time and money
- High degree of whiteness
- TÜV approved and externally monitored



Headoffice Country  
Name  
Street, number  
Zip code City

Phone +00 0000 0000-00  
Fax +00 0000 0000-00  
e-mail-address  
www-address



Quality Management System  
Sto AG, DIN EN ISO 9001, reg.-no. 3651  
Environmental Management System  
Sto AG, DIN EN ISO 14001, reg.-no. 365  
Plants in Stühlingen, Donaueschingen,  
Tollwitz, Rüsselshelm, Krittzel

The concrete technical specifications and information on the products contained in the Technical Data Sheets and system descriptions/approvals must be observed.